

Waterfit

A Thomas Dudley Company

CDU SUPPLIES LTD

CIVILS - DRAINAGE - UTILITY



METERFIT™

For shallower installations, the Meterfit boundary box is the perfect option.

Conforms to BS 5834-1.

WRAS APPROVED PRODUCT

INSTALLERS

ACETAL BODY


Reinforced with acetal material, the updated Meterfit provides confidence for installers.

CLOCKWISE QUARTER TURN BALL VALVE

User friendly positive shut off valve combines ease of use and improved head loss.

HIGH QUALITY SEALS

Ball seals are manufactured using ultra high performance DuPont Hytrel material, ensuring a long life with reduced need to replace during the products lifespan.

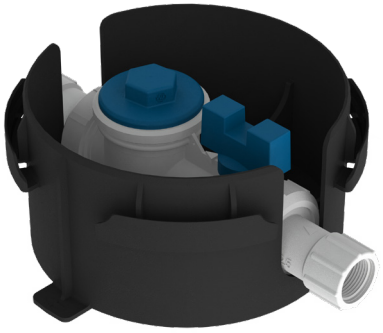

BUYERS

PROVEN QUALITY


The Meterfit has been supplied for over 25 years so has been fully tried and tested in the field.

100% FACTORY TESTED

Each manifold is 100% tested on-site to ensure a quality product is delivered with no issues at the point of installation.

100% UK MANUFACTURED

Manufactured and assembled in the West Midlands, allowing swift response to customer fluctuations, with the added benefit of a reduced carbon footprint.

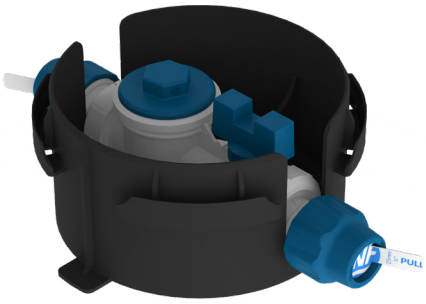

ASSET OWNERS

LEAK-FREE SINGLE PIECE MANIFOLD

The robust single piece manifold ensures reduced leak paths, providing confidence in a long asset life.

O-RING REASSURANCE


Outlets are fitted with a double O-ring seal, reassuring the product will not leak.

FULLY CAPTIVE CHECK VALVE

The check valve is reinforced with a bush that means there is no risk of the valve coming loose into the service pipe.

100% RECYCLED GUARD TUBE

Our award winning guard tube is environmentally friendly, and pure white to allow for 400% better visibility for accurate meter readings.

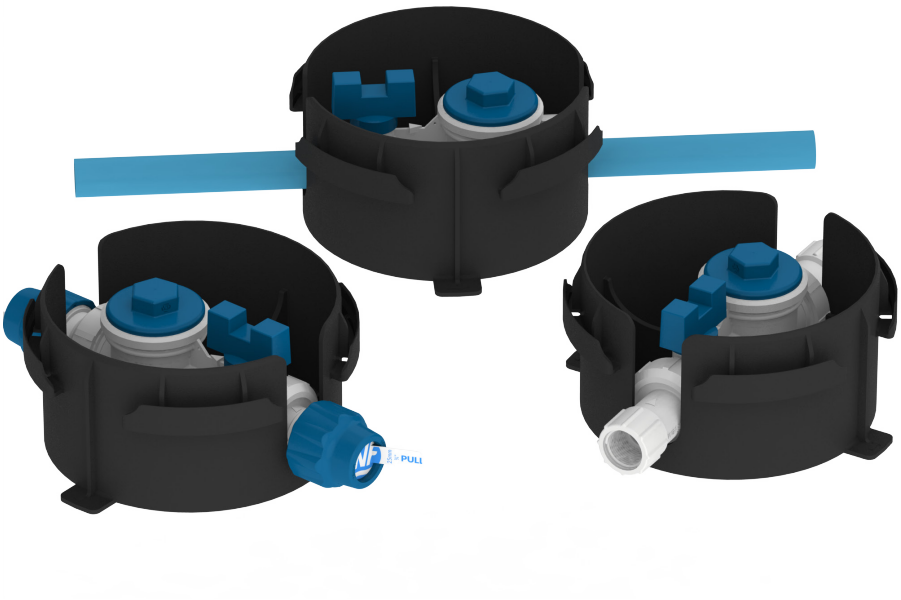

25MM PUSHFIT OUTLETS

- Standard 25mm pushfit outlets, complete with liner, the best option for new connections.

25MM MDPE OUTLETS

- 150mm length moulded 25mm MDPE (**BS 12201-2:2011**) outlets, intended for use with pushfit adaptors for connection to non-25mm MDPE pipe.

¾" FEMALE IRON OUTLETS

- ¾" BSP female iron connections intended for use with male iron adaptors for connection to any number of pipes.

½" IRISH HEAVY GAUGE PUSHFIT OUTLETS

- Standard pushfit outlets used for direct connection to ½" Irish Heavy Gauge pipe (**I.S. 135**).

CODE	PART
MK7800003055	25mm Pushfit c/w Base & 800mm Rigid Tube
MK7800002893	25mm Pushfit c/w Base, 800mm Rigid Tube & Combi Surface Box
MK7800003622	25mm Pushfit c/w Base, 800mm Rigid Tube & Plastic Lid
MK7750003571	25mm Pushfit c/w Base & 450-750mm Telescopic Tube
MK7750003570	25mm Pushfit c/w Base, 450-750mm Tele Tube & Combi Surface Box

LID (PAGE 20)

+

TUBE (PAGE 18)

+

BASE UNIT

=

BOUNDARY BOX




1½" GM METERFIT™

Similar to the Meterfit but with a gunmetal manifold, making it more suitable for contaminated land sites.

Conforms to ***BS 5834-1****.*

WRAS APPROVED PRODUCT

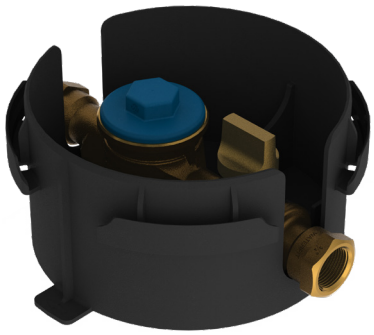


INSTALLERS

GUNMETAL BODY

Corrosion resistant material ensures the this boundary box is suitable for contaminated ground.

CLOCKWISE QUARTER TURN BALL VALVE

User friendly positive shut off valve combines ease of use and improved head loss.

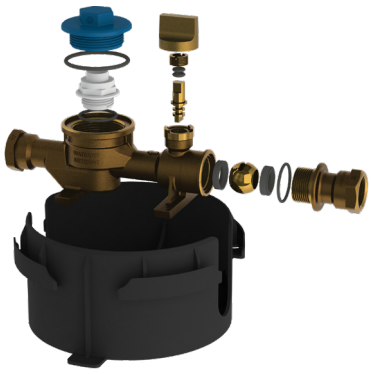

BUYERS

PROVEN QUALITY

The GM Meterfit™ has been supplied for over 25 years so has been fully tried and tested in the field.

100% FACTORY TESTED

Each manifold is 100% tested on-site to ensure a quality product is delivered with no issues at the point of installation.

ASSET OWNERS

LEAK-FREE SINGLE PIECE MANIFOLD


The robust single piece manifold ensures reduced leak paths, providing confidence in a long asset life.

FULLY CAPTIVE CHECK VALVE

The check valve is reinforced with a bush that means there is no risk of the valve coming loose into the service pipe.

100% RECYCLED GUARD TUBE

Our award winning guard tube is environmentally friendly, and pure white to allow for 400% better visibility for accurate meter readings.

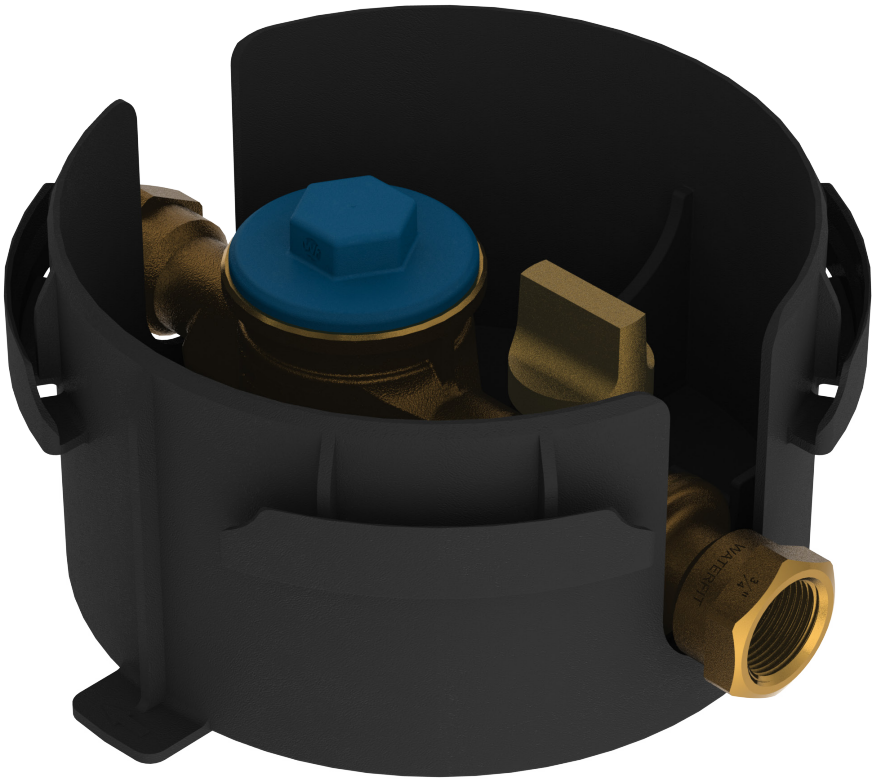

¾" FEMALE IRON OUTLETS

- ¾" BSP female iron connections intended for use with male iron adaptors for connection to any number of pipes.

CODE	PART
MK8800002735	¾" GM Female Iron c/w Base & 800mm Rigid Tube
MK8750003383	¾" GM Female Iron c/w Base & 800mm Rigid Tube (DZR Pressure Cap)
MK8800003415	¾" GM Female Iron c/w Base, 800mm Rigid Tube & Cast Iron Surface Box
MK8800002897	¾" GM Female Iron c/w Base, 800mm Rigid Tube & Combi Surface Box
MK8750003383	¾" GM Female Iron c/w Base & 450-750mm Telescopic Tube
MK8750003672	¾" GM Female Iron c/w Base, 450-750mm Tele Tube & Combi Surface Box

LID (PAGE 20)

+

TUBE (PAGE 18)

+

BASE UNIT

=

BOUNDARY BOX



2” GM METERFIT™

As per 1½” GM Meterfit, but features a large aperture to fit a 2” water meter, with 1” BSP outlets.

*Conforms to **BS 5834-1**.*

INSTALLERS

GUNMETAL BODY

Corrosion resistant material ensures the this boundary box is suitable for contaminated ground.

CLOCKWISE QUARTER TURN BALL VALVE

User friendly positive shut off valve combines ease of use and improved head loss.

COMPACT 2” BOUNDARY BOX

The manifold is able to fit inside a standard 200mm tube.




BUYERS

PROVEN QUALITY

The GM Meterfit™ has been supplied for over 25 years so has been fully tried and tested in the field.

100% FACTORY TESTED

Each manifold is 100% tested on-site to ensure a quality product is delivered with no issues at the point of installation.

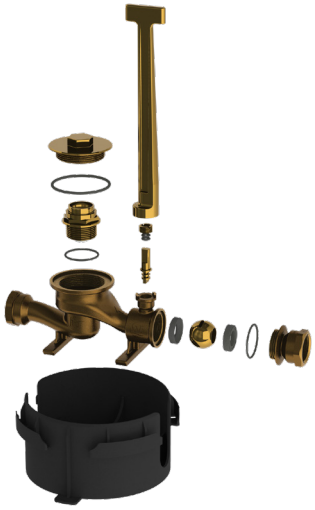

ASSET OWNERS

LEAK-FREE SINGLE PIECE MANIFOLD

The robust single piece manifold ensures reduced leak paths, providing confidence in a long asset life.

FULLY CAPTIVE CHECK VALVE

The check valve is reinforced with a bush that means there is no risk of the valve coming loose into the service pipe.

100% RECYCLED GUARD TUBE

Our award winning guard tube is environmentally friendly, and pure white to allow for 400% better visibility for accurate meter readings.

CODE	PART
MK8800002735	1” GM Female Iron c/w Base & 800mm Rigid Tube
MK8750003383	1” GM Female Iron c/w Base & 800mm Rigid Tube (DZR Pressure Cap)
MK8800003415	1” GM Female Iron c/w Base, 800mm Rigid Tube & Cast Iron Surface Box
MK8800002897	1” GM Female Iron c/w Base, 800mm Rigid Tube & Combi Surface Box



Waterfit
A Thomas Dudley Company

Waterfit Ltd. 293 Birmingham New Road, Dudley, West Midlands DY1 4SJ
+44(0)121 520 7987 +44(0)121 522 4557 enquiries@waterfit.co.uk
www.waterfit.co.uk